




TECHNICAL DATA	
FRAME	M (up to 165 cm) L (165 cm - 175 cm) XL (from 175 cm)
SUSPENSION	RockShox Recon Silver RL Solo Air™ airtuspension 15 x 100 mm, Tapered
MOTOR	Bosch Smart System Performance Line CX
MAX. TORQUE	85 Nm
BATTERY	Bosch PowerTube 750 Wh
COMPUTER	Bosch LED Remote
DISPLAY	Bosch Intuvia 100 / Optional: Bosch Kiox 300, SmartphoneGrip
GEAR	Enviolo CVP TR / Optional: Enviolo AUTOMATIQ
GEAR LEVER	Enviolo CT Twist Pure
CRANK	Miranda Delta 170 mm
DRIVE	Gates CDX I25 T
FRONT SPROCKET	Gates CDX 55 T with Bashguard
REAR SPROCKET	Gates CDX 24 T
BRAKES	Magura VR MT5 203 mm, HR MT4 180 mm
STEM	Ergotec Sepia XL FI 50, 90 mm, adjustable
HANDLEBAR	Ergotec Lady Town I, 650 mm, 30°
GRIP	Ergon GPI0-L black
PEDALS	VP Components VPE-527
MUDGUARD	HNF Aluminium Multi Cavity Extrusion
LUGGAGE RACK	Racktime for HNF snap-It 2.0, 25 kg
SEATPOST	Ergotec Atar 31,6 mm
SADDLE	Selle Royal ON Moderate
FRONT HUB	Shimano HB-MT410-B
REAR HUB	Enviolo CVP TR
RIMS	Ryde Andra Disc 27.5 Zoll 584-29
TYRES	WTB Groov-E FG 62-584 Reflex
FRONT LIGHT	Supernova MINI 2
BACK LIGHT	Supernova M99 TL3 PRO MAX with brake light and emergency brake signal
STAND	Pletscher Optima Flex
LOCK	Abus Bordo Folding lock 6500/I20 Granit Xplus
COLOR	red matte, black matte / Special-Edition: white glossy
WEIGHT	approx. 30 kg
PERM. TOTAL WEIGHT	approx. 150 kg



	M	L	XL
A SEAT TUBE LENGTH	430 mm	470 mm	510 mm
B TOP TUBE LENGTH	585 mm	610 mm	635 mm
C HEAD TUBE LENGTH	185 mm	185 mm	185 mm
D HEAD TUBE ANGLE	68,0°	68,0°	68,0°
E SEAT TUBE ANGLE	76,0°	76,0°	76,0°
F CHAIN STAY LENGTH	473 mm	473 mm	473 mm
G WHEEL BASE	1.185 mm	1.210 mm	1.235 mm
H STACK	696 mm	696 mm	696 mm
I REACH	412 mm	437 mm	462 mm
J BB DROP	56 mm	56 mm	56 mm

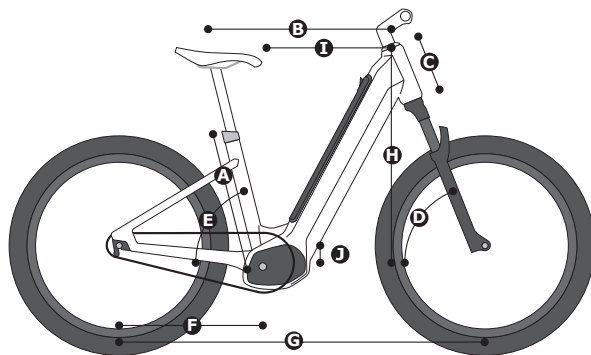